OMAN®

PRODUCT CATALOGUE
01.02.2023

NEW MODEL OF LOFT LADDERS

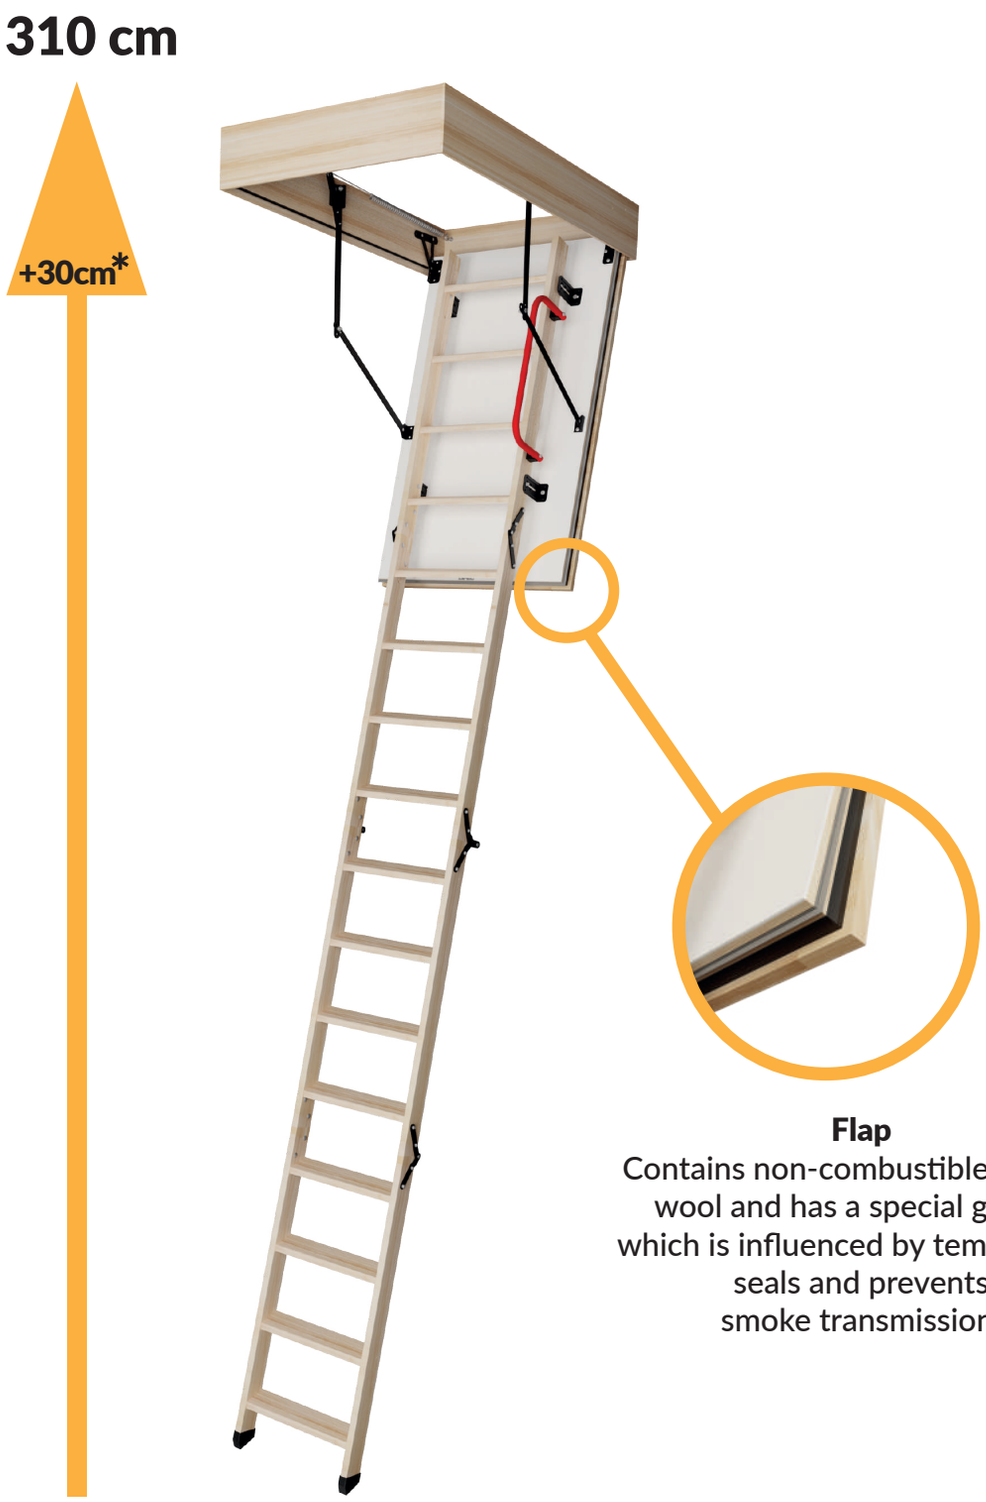

Flap
Contains non-combustible mineral wool and has a special gasket, which is influenced by temperature seals and prevents smoke transmission.

* COMPARED TO EI 45

The **EI45 LONG** model is ideally suited for installation in rooms particularly exposed to fire outbreak. Their fire safety properties allows an effective isolation of the room, in which the fire occurred from the attic. The excellent quality of materials used for the production of loft ladders and attention to every detail of finish cause that the stairs will satisfy even the most demanding customers.

The **EI45 LONG** loft ladders are characterized by double sealing, including a single fire resistant sealing and hatch thickness 66mm. The **EI45 LONG** loft ladders have the **EI45** fire resistance class. The loft ladders have anti skidding feets, they adheres perfectly to the ground, prevent scratching of the foor and provide an aesthetic finish for the ladder after cutting. For increased safety and convenience of use, **EI45 LONG** loft ladders are equipped in a stable and durable handrail. In the interest of user convenience, the handrail can be installed on the left or right side – depending on the customer preferences. Their maximum load during use is up to 160 kg.

EI45 LONG

CLASSIC LOFT LADDER

POLAR

4 CLASS AIR TIGHT NESS

EN 14975 COMPLIANCE WITH THE STANDARD

U_d =0,36 W/m²*K

5 YEARS GUARANTEE

ADDITIONAL STEP

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

2x SEALS

Insulated hatch thickness	86 mm
Thickness of thermal insulation	80 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	139/147 cm
Opening distance/angle	165/169 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

113x55 120x55 130x55 140x55
113x60 120x60 130x60 140x60
113x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

POLAR Z2

4 CLASS AIR TIGHT NESS

EN 14975 COMPLIANCE WITH THE STANDARD

5 YEARS GUARANTEE

U_d =0,36 W/m²*K

TWO-POINT LOCK

ADDITIONAL STEP

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

2x SEALS

Insulated hatch thickness	86 mm
Thickness of thermal insulation	80 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	139/147 cm
Opening distance/angle	165/169 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

113x55 120x55 130x55 140x55
113x60 120x60 130x60 140x60
113x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

MAXI

U_d =0,7 W/m²*K

EN 14975 COMPLIANCE WITH THE STANDARD

3 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

2x SEALS

Insulated hatch thickness	56 mm
Thickness of thermal insulation	50 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	151 cm
Opening distance/angle	168 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

120x55 130x55
120x60 130x60
120x70 130x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

EXTRA

U_d =0,85 W/m²*K | EN 14975 COMPLIANCE WITH THE STANDARD | 3 YEARS GUARANTEE

160 KG MAXIMUM LOAD | HANDRAIL | PROTECTIVE FEET | 1x SEAL

Insulated hatch thickness	46 mm
Thickness of thermal insulation	40 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	128/142 cm
Opening distance/angle	161/165 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

110x55 120x55 130x55 140x55
110x60 120x60 130x60 140x60
110x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

KOMFORT

U_d =1,1 W/m²*K | EN 14975 COMPLIANCE WITH THE STANDARD | 3 YEARS GUARANTEE

160 KG MAXIMUM LOAD | HANDRAIL | PROTECTIVE FEET | 1x SEAL

Insulated hatch thickness	36 mm
Thickness of thermal insulation	30 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	135 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	134/148 cm
Opening distance/angle	160/166 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

110x55 120x55 130x55 140x55
110x60 120x60 130x60 140x60
110x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

TERMO PS

U_d =1,22 W/m²*K | EN 14975 COMPLIANCE WITH THE STANDARD | 3 YEARS GUARANTEE

160 KG MAXIMUM LOAD | HANDRAIL | PROTECTIVE FEET | 1x SEAL

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	135 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	134/148 cm
Opening distance/angle	160/166 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

110x55 120x55 130x55 140x55
110x60 120x60 130x60 140x60
110x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

LOFT LADDERS
ZERO GRAVITY

POLAR PLUS

Insulated hatch thickness	86 mm
Thickness of thermal insulation	80 mm
Hatch colour from both sides	White
Wooden-metal ladder	3 sections
Height of wooden box	170 mm
Width of ladder	370/400 mm
Width of step	328/ 358 mm
Depth of step	80 mm
Landing space	147 cm
Opening distance/angle	169 cm
Maximum ceiling height	280 cm

Box dimensions [cm]
120x60
120x70

Width of ladder for dimensions 120x60 - 370 mm
Width of ladder for dimensions 120x70 - 400 mm
Outer box dimensions, mounting opening 2 cm larger
Additional accesories on pages 20 – 23

MAXI PLUS

Insulated hatch thickness	56 mm
Thickness of thermal insulation	50 mm
Hatch colour from both sides	White
Wooden-metal ladder	3 sections
Height of wooden box	170 mm
Width of ladder	370/400 mm
Width of step	328/ 358 mm
Depth of step	80 mm
Landing space	151 cm
Opening distance/angle	168 cm
Maximum ceiling height	280 cm

Box dimensions [cm]
120x60
120x70

Width of ladder for dimensions 120x60 - 370 mm
Width of ladder for dimensions 120x70 - 400 mm
Outer box dimensions, mounting opening 2 cm larger
Additional accesories on pages 20 – 23

MINI LOFT LADDERS

MINI POLAR

4 CLASS AIR TIGHT NESS

EN 14975 COMPLIANCE WITH THE STANDARD

U_d =0,36 W/m²*K

5 YEARS GUARANTEE

ADDITIONAL STEP

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

2x SEALS

Insulated hatch thickness	86 mm
Thickness of thermal insulation	80 mm
Hatch colour from both sides	White
Wooden-metal ladder	4 sections
Height of wooden box	170 mm
Width of ladder	365 mm
Width of step	324 mm
Depth of step	80 mm
Landing space	142/149 cm
Opening distance/angle	132/133 cm
Maximum ceiling height	265 cm

Box dimensions [cm]

90x50* 100x50* 110x50*
90x55 100x55 110x55
90x60 100x60 110x60
90x70 100x70 110x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

*no possibility of installing a handrail

MINI EXTRA

U_d =0,85 W/m²*K

EN 14975 COMPLIANCE WITH THE STANDARD

3 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

1x SEAL

Insulated hatch thickness	46 mm
Thickness of thermal insulation	40 mm
Hatch colour from both sides	White
Wooden-metal ladder	4 sections
Height of wooden box	170 mm
Width of ladder	365 mm
Width of step	324 mm
Depth of step	80 mm
Landing space	103/130 cm
Opening distance/angle	120/125 cm
Maximum ceiling height	260/265 cm

Box dimensions [cm]

80x60 90x60 100x60
80x70 90x70 100x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

MINI TERMO

U_d =1,22 W/m²*K

EN 14975 COMPLIANCE WITH THE STANDARD

160 KG MAXIMUM LOAD

HANDRAIL

1x SEAL

3 YEARS GUARANTEE

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Wooden-metal ladder	4 sections
Height of wooden box	135 mm
Width of ladder	365 mm
Width of step	324 mm
Depth of step	80 mm
Landing space	101/135 cm
Opening distance/angle	115/125/126 cm
Maximum ceiling height	260/265 cm

Box dimensions [cm]

80x60 90x60 100x60
80x70 90x70 100x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

FLEX LOFT LADDER

FLEX POLAR

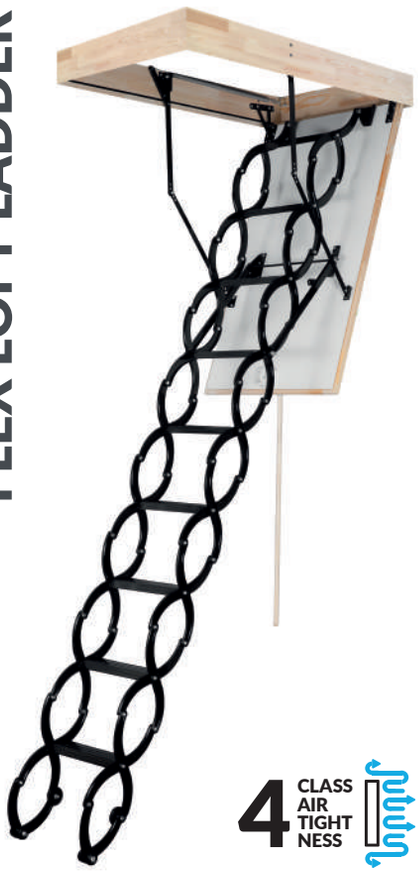

4 CLASS AIR TIGHT NESS

U_d =0,36 W/m²·K

EN 14975 COMPLIANCE WITH THE STANDARD

5 YEARS GUARANTEE

160 KG MAXIMUM LOAD

ADDITIONAL STEP

10x STEPS FLEX

2x SEALS

Insulated hatch thickness	86 mm
Thickness of thermal insulation	80 mm
Hatch colour from both sides	White
Flex ladder	10 steps
Height of wooden box	170 mm
Width of ladder	390 mm
Width of step	345 mm
Depth of step	80 mm
Landing space	210 cm
Opening distance/angle	245 cm
Maximum ceiling height	290 cm

Box dimensions [cm]

120x60

120x70

Outer box dimensions, mounting opening 2 cm larger

Additional accesories on pages 20 – 23

FLEX TERMO

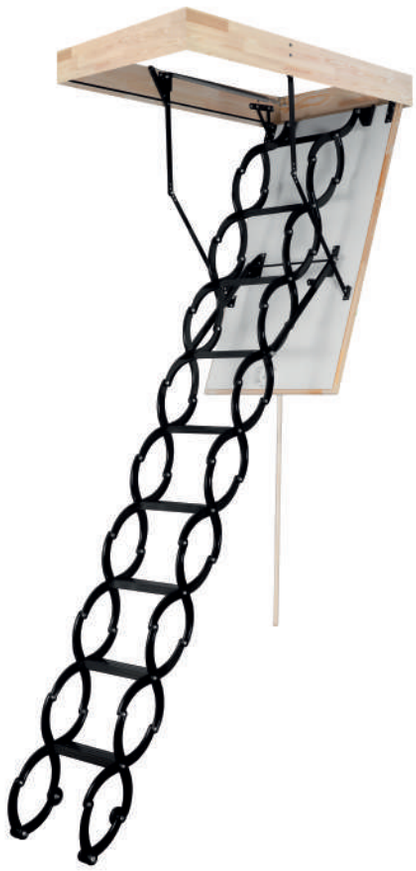

U_d =1,22 W/m²·K

EN 14975 ENTSPRICHT DEN NORMEN

160 KG MAXLIMALE BELASTBARKEIT

1x DICHTUNG

10x STUFEN FLEX

3 JAHRE GARANTIE

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Flex ladder	10 steps
Height of wooden box	135 mm
Width of ladder	390 mm
Width of step	345 mm
Depth of step	80 mm
Landing space	195/200/210 cm
Opening distance	220/225/230/245 cm
Maximum ceiling height	290 cm

Box dimensions [cm]

70x60 80x60 90x60 100x60 110x60 120x60 130x60

70x70 80x70 90x70 100x70 110x70 120x70 130x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

FLEX TERMO METALBOX

U_d =1,22 W/m²·K

160 KG MAXIMUM LOAD

10x STEPS FLEX

EN 14975 COMPLIANCE WITH THE STANDARD

3 YEARS GUARANTEE

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Flex ladder	10 steps
Height of metal box	145 mm
Width of ladder	x50 = 290 mm x60,70 = 390 mm
Width of step	x50 = 245 mm x60,70 = 345 mm
Depth of step	80 mm
Landing space	195/200/210 cm
Opening distance	220/225/230/245 cm
Maximum ceiling height	290 cm

Box dimensions [cm]

70x50 80x50 90x50 100x50

70x60 80x60 90x60 100x60 110x60 120x60 130x60

70x70 80x70 90x70 100x70 110x70 120x70 130x70

Outer box dimensions, mounting opening 2 cm larger

Additional accesories on pages 20 – 23

SOLID LOFT LADDER

SOLID POLAR

4 CLASS AIR TIGHT NESS

EN 14975 COMPLIANCE WITH THE STANDARD

U_d =0,36 W/m²*K

5 YEARS GUARANTEE

ADDITIONAL STEP

210 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

2x SEALS

Insulated hatch thickness	86 mm
Thickness of thermal insulation	80 mm
Hatch colour from both sides	White
Metal ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	361 mm
Depth of step	113 mm
Landing space	139/147 cm
Opening distance	165/169 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

113x55* 120x55* 130x55* 140x55*
113x60 120x60 130x60 140x60
113x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger
Non-standard box dimensions and additional accesories on pages 20 – 23

*no possibility of installing a handrail

SOLID EXTRA

U_d =0,85 W/m²*K

EN 14975 COMPLIANCE WITH THE STANDARD

3 YEARS GUARANTEE

210 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

1x SEAL

Insulated hatch thickness	46 mm
Thickness of thermal insulation	40 mm
Hatch colour from both sides	White
Metal ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	361 mm
Depth of step	113 mm
Landing space	128/142 cm
Opening distance	161/165 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

110x55* 120x55* 130x55* 140x55*
110x60 120x60 130x60 140x60
110x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger
Non-standard box dimensions and additional accesories on pages 20 – 23

*no possibility of installing a handrail

SOLID TERMO

U_d =1,22 W/m²*K

EN 14975 COMPLIANCE WITH THE STANDARD

190 KG MAXIMUM LOAD

PROTECTIVE FEET

1x SEAL

3 YEARS GUARANTEE

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Metal ladder	3 sections
Height of wooden box	135 mm
Width of ladder	400 mm
Width of step	361 mm
Depth of step	113 mm
Landing space	134/148 cm
Opening distance	160/166 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

110x55* 120x55* 130x55* 140x55*
110x60 120x60 130x60 140x60
110x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger
Non-standard box dimensions and additional accesories on pages 20 – 23

*no possibility of installing a handrail

LONG LOFT LADDER

LONG POLAR

4 CLASS AIR TIGHT NESS

EN 14975 COMPLIANCE WITH THE STANDARD

U_d =0,36 W/m²*K

ADDITIONAL STEP

5 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

2x SEALS

Insulated hatch thickness	86 mm
Thickness of thermal insulation	80 mm
Hatch colour from both sides	White
Wooden ladder	4 section
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	175 cm
Opening distance/angle	172 cm
Maximum ceiling height	310 cm

Box dimensions [cm]

120x60 130x60
120x70 130x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

LONG EXTRA

U_d =0,85 W/m²*K

EN 14975 COMPLIANCE WITH THE STANDARD

3 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

1x SEAL

Insulated hatch thickness	46 mm
Thickness of thermal insulation	40 mm
Hatch colour from both sides	White
Wooden ladder	4 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	165 cm
Opening distance/angle	167 cm
Maximum ceiling height	330 cm

Box dimensions [cm]

120x55 130x55 140x55
120x60 130x60 140x60
120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

LONG TERMO PS

U_d =1,22 W/m²·K

EN 14975 COMPLIANCE WITH THE STANDARD

3 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

1x SEAL

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Wooden ladder	4 sections
Height of wooden box	135 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	172 cm
Opening distance/angle	168 cm
Maximum ceiling height	330 cm

Box dimensions [cm]

120x55 130x55 140x55
120x60 130x60 140x60
120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

LONG FLEX TERMO

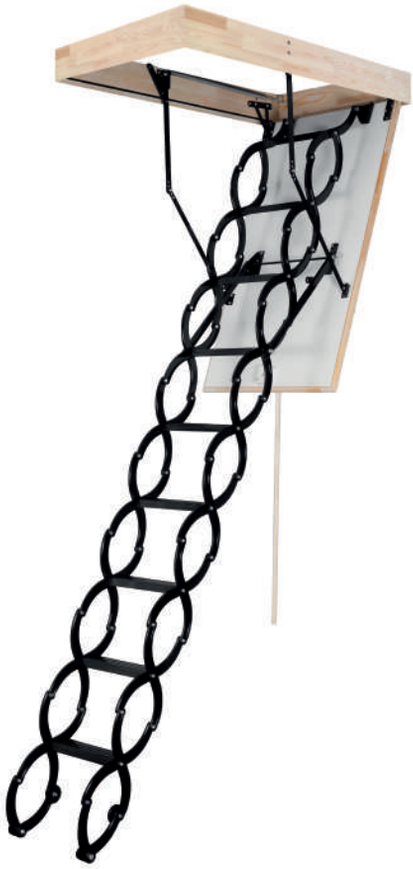

U_d =1,22 W/m²·K

EN 14975 COMPLIANCE WITH THE STANDARD

160 KG MAXIMUM LOAD

11x STEPS FLEX

1x SEAL

3 YEARS GUARANTEE

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Flex ladder	11 steps
Height of wooden box	135 mm
Width of ladder	390 mm
Width of step	345 mm
Depth of step	80 mm
Landing space	205/220 cm
Opening distance	245/250/260 cm
Maximum ceiling height	310 cm

Box dimensions [cm]

80x60 90x60 100x60 110x60 120x60 130x60
80x70 90x70 100x70 110x70 120x70 130x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

FIRE RESISTANT LOFT LADDERS

EI45

EI45

EN 14975 COMPLIANCE WITH THE STANDARD

U_d = 0,54 W/m²·K | PROTECTIVE FEET | 3 YEARS GUARANTEE

160 KG MAXIMUM LOAD | HANDRAIL | 1x FIRE RESISTANT SEAL | 1x SEAL

Insulated hatch thickness	66 mm
Thickness of thermal insulation	60 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	145 cm
Opening distance/angle	168 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

120x60 130x60
120x70 130x70

Outer box dimensions, mounting opening 2 cm larger
Additional accesories on pages 20 – 23

EI45 MINI

EI45

EN 14975 COMPLIANCE WITH THE STANDARD

U_d = 0,54 W/m²·K | PROTECTIVE FEET | 3 YEARS GUARANTEE

160 KG MAXIMUM LOAD | HANDRAIL | 1x FIRE RESISTANT SEAL | 1x SEAL

Insulated hatch thickness	66 mm
Thickness of thermal insulation	60 mm
Hatch colour from both sides	White
Wooden-metal ladder	4 sections
Height of wooden box	170 mm
Width of ladder	365 mm
Width of step	324 mm
Depth of step	80 mm
Landing space	103/130 cm
Opening distance/angle	120/125 cm
Maximum ceiling height	260/265 cm

Box dimensions [cm]

90x60 100x60
90x70 100x70

Outer box dimensions, mounting opening 2 cm larger
Additional accesories on pages 20 – 23

EI45 POLAR

EI45

4 CLASS AIR TIGHT NESS

ADDITIONAL FEET | EN 14975 COMPLIANCE WITH THE STANDARD

U_d =0,43 W/m²·K | PROTECTIVE FEET | 5 YEARS GUARANTEE

160 KG MAXIMUM LOAD | HANDRAIL | 1x FIRE RESISTANT SEAL | 1x SEALS

Insulated hatch thickness	86 mm
Thickness of thermal insulation	80 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	147 cm
Opening distance/angle	169 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

120x60 130x60
120x70 130x70

Outer box dimensions, mounting opening 2 cm larger
Additional accesories on pages 20 – 23

EI45 LONG

EI45

EN 14975 COMPLIANCE WITH THE STANDARD

U_d = 0,54 W/m²·K

PROTECTIVE FEET

3 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

1x FIRE RESISTANT SEAL

1x SEAL

Insulated hatch thickness	66 mm
Thickness of thermal insulation	60 mm
Hatch colour from both sides	White
Wooden ladder	4 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	165 cm
Opening distance/angle	171 cm
Maximum ceiling height	310 cm

Box dimensions [cm]

120x60
120x70

Outer box dimensions, mounting opening 2 cm larger

Additional accesories on pages 20 – 23

EI60

EI60

EN 14975 COMPLIANCE WITH THE STANDARD

U_d = 0,54 W/m²·K

PROTECTIVE FEET

3 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

1x FIRE RESISTANT SEAL

1x SEAL

Insulated hatch thickness	66 mm
Thickness of thermal insulation	60 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	145 cm
Opening distance/angle	168 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

120x60 130x60
120x70 130x70

Outer box dimensions, mounting opening 2 cm larger

Additional accesories on pages 20 – 23

EI60 SOLID

EI60

EN 14975 COMPLIANCE WITH THE STANDARD

U_d = 0,54 W/m²·K

PROTECTIVE FEET

3 YEARS GUARANTEE

210 KG MAXIMUM LOAD

HANDRAIL

1x FIRE RESISTANT SEAL

1x SEAL

Insulated hatch thickness	66 mm
Thickness of thermal insulation	60 mm
Hatch colour from both sides	White
Metal ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	361 mm
Depth of step	113 mm
Landing space	145 cm
Opening distance/angle	168 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

120x60 130x60
120x70 130x70

Outer box dimensions, mounting opening 2 cm larger

Additional accesories on pages 20 – 23

OTHER LOFT LADDERS

ALUPROFI EXTRA

U_d =0,85 W/m²·K

EN 14975 COMPLIANCE WITH THE STANDARD

3 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

1x SEAL

Insulated hatch thickness	46 mm
Thickness of thermal insulation	40 mm
Hatch colour from both sides	White
Aluminium ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	350 mm
Depth of step	80 mm
Landing space	128/142 cm
Opening distance/angle	161/165 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

110x55 120x55 130x55 140x55
110x60 120x60 130x60 140x60
110x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

STALLUX TERMO

U_d =1,22 W/m²·K

EN 14975 COMPLIANCE WITH THE STANDARD

3 YEARS GUARANTEE

160 KG MAXIMUM LOAD

HANDRAIL

PROTECTIVE FEET

1x SEAL

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Wooden-metal ladder	3 sections
Height of wooden box	135 mm
Width of ladder	400 mm
Width of step	359 mm
Depth of step	80 mm
Landing space	134/148 cm
Opening distance/angle	160/166 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

110x55 120x55 130x55 140x55
110x60 120x60 130x60 140x60
110x70 120x70 130x70 140x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

COMPACT TERMO

U_d =1,22 W/m²·K

EN 14975 COMPLIANCE WITH THE STANDARD

160 KG MAXIMUM LOAD

PROTECTIVE FEET

1x SEAL

3 YEARS GUARANTEE

Insulated hatch thickness	26 mm
Thickness of thermal insulation	20 mm
Hatch colour from both sides	White
Wooden ladder	4 sections
Height of wooden box	135 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Landing space	146 cm
Opening distance/angle	135 cm
Maximum ceiling height	280 cm

Box dimensions [cm]

100x55
100x60
100x70

Outer box dimensions, mounting opening 2 cm larger

Non-standard box dimensions and additional accesories on pages 20 – 23

ACCESSORIES

Hatch balustrade
DSS B

The hatch balustrade is installed directly to the ladder box from the top of the ladder. It is made of wood and equipped with metal brackets. It increases the safety and protects against falling into the ladder opening.

Dimensions [cm]
Possibility of cutting for smaller box dimensions
120x70 - 140x85

Masking batten
DSS LM-1

The masking batten covers the underneath connection of the box with the ceiling. It is made from white plastic which provides very aesthetic design. Simple and easy installation from the cut to size battens. It does not require additional tools or fitting elements (nails, screws).

Dimensions [cm]
120x70 – 140x85
Possibility of self-cutting for a smaller box size

Mounting system
DSS ZM-1

The special mounting system allows individual installation of the ladder to the ceiling. It ensures safe falling of the box to the desired height and fastening it to the ceiling.

Protective feet
DSS S-1

The protective feet made from plastic increase the safety and ensure an aesthetic finish.

4 section ladder
PSS D-1

A 4-section ladder with a length of up to 3.3 m in height. The PSS D-1 ladder is compatible with stairs with a minimum box length of 120 cm.

It is incompatible with TERMO PS and EXTRA stair models in size 110, Polar in size 113 and MAXI in all sizes..

Additional step
DSS DS-2

In case of mounting on the box, additional step DSS DS-2 is compatible with all Loft Ladders models with wooden box with minimum height of 170 mm.

Dimensions [cm]
Should be adjusted to the type of ladder
310mm - MINI / 330mm - Others

Additional step flex
DSS DS-3

An additional step will extend the ladder to the maximum 310cm high.

Dimensions [cm]
Should be adjusted to the width of box
260mm - to the box width 50cm
360mm - to the box width above 50cm
*Incompatible with boxes (dimension B) < 80cm

Handrail
DSS P-1-2
DSS P-3-2

The metal handrail is attached to the hatch along the ladder. It provides a secure handle when ascending and descending the ladder. Easy installation is possible on the right or left hand side of the ladder or on both sides of it.

DSS P-1-2 for the MINI and Compact Termo loft ladders.
DSS P-3-2 for the Loft Ladders with the boxdimension greater than or equal to 110 cm.

WALL HATCHES

DK POLAR

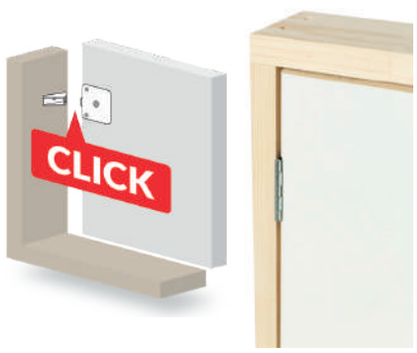

U_d =0,36 W/m²·K | 2x SEALS | 5 YEARS GUARANTEE

Insulated hatch thickness	86 mm
Thickness of thermal instulation	80 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Door opening method	Handle
Slotted hinge	Metal
Guarantee	5 years
Frame material	Softwood
Included in a kit	Masking batten
Opening to the left or to the right side	
Purpose of use	Interior
Locking latch when closed	

Box dimensions [cm] HxW

80x55 90x55
70x60 80x60 90x60 100x60 110x60
70x70 80x70 90x70 100x70 110x70

Min-Max height 55-100
Min-Max width 55-90

Outer box dimensions, mounting opening 2 cm larger

DK MAXI

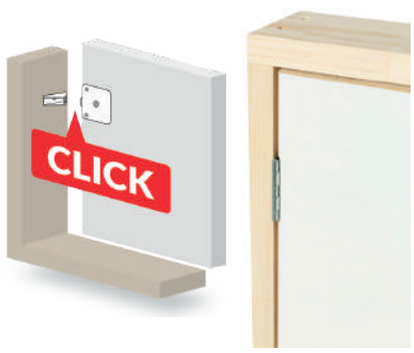

U_d =0,7 W/m²·K | 2x SEALS | 3 YEARS GUARANTEE

Insulated hatch thickness	56 mm
Thickness of thermal instulation	50 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Door opening method	Handle
Slotted hinge	Metal
Guarantee	3 years
Frame material	Softwood
Included in a kit	Masking batten
Opening to the left or to the right side	
Purpose of use	Interior
Locking latch when closed	

Box dimensions [cm] HxW

80x55 90x55
70x60 80x60 90x60 100x60 110x60
70x70 80x70 90x70 100x70 110x70

Min-Max height 55-100
Min-Max width 55-90

Outer box dimensions, mounting opening 2 cm larger

DK EXTRA

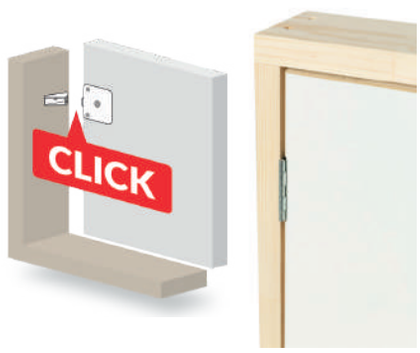

U_d =0,85 W/m²·K | 1x SEALS | 3 YEARS GUARANTEE

Insulated hatch thickness	46 mm
Thickness of thermal instulation	40 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Door opening method	Handle
Slotted hinge	Metal
Guarantee	3 years
Frame material	Softwood
Included in a kit	Masking batten
Opening to the left or to the right side	
Purpose of use	Interior
Locking latch when closed	

Box dimensions [cm] HxW

80x55 90x55
70x60 80x60 90x60 100x60 110x60
70x70 80x70 90x70 100x70 110x70

Min-Max height 55-100
Min-Max width 55-90

Outer box dimensions, mounting opening 2 cm larger

DK TERMO

U_d =1,22 W/m²·K

1x SEALS

3 YEARS GUARANTEE

Insulated hatch thickness	26 mm
Thickness of thermal instulation	20 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Door opening method	Handle
Slotted hinge	Metal
Guarantee	3 years
Frame material	Softwood
Included in a kit	Masking batten
Opening to the left or to the right side	
Purpose of use	Interior
Locking latch when closed	

Box dimensions [cm] HxW

80x55 90x55
70x60 80x60 90x60 100x60 110x60
70x70 80x70 90x70 100x70 110x70

Min-Max Höhe 55-100
Min-Max Breite 55-90

Outer box dimensions, mounting opening 2 cm larger

DK EI30 POLAR

U_d =0,43 W/m²·K

1x FIRE RESISTANT SEAL

2x SEALS

5 YEARS GUARANTEE

Insulated hatch thickness	86 mm
Thickness of thermal instulation	80 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Door opening method	Knob
Slotted hinge	Metal
Guarantee	5 years
Frame material	Softwood
Opening to the left or to the right side	
Purpose of use	Interior
Locking latch when closed	

Box dimensions [cm] HxW

80x55 90x55
70x60 80x60 90x60 100x60 110x60
70x70 80x70 90x70 100x70 110x70

Outer box dimensions, mounting opening 2 cm larger

WS POLAR

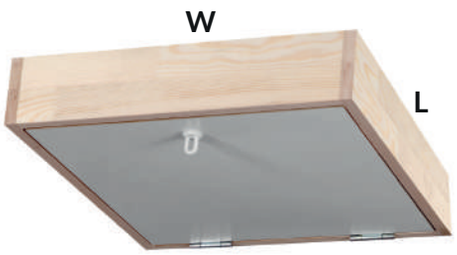

U_d =0,36 W/m²·K

2x SEALS

5 YEARS GUARANTEE

Insulated hatch thickness	86 mm
Thickness of thermal instulation	80 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Frame material	Softwood
Slotted hinge	Metal
Guarantee	5 years
Type of opening	Drop-down
Type of lock	Locking latch when closed
Opening to the left or to the right side	
Purpose of use	Interior

Box dimensions [cm] LxW
51x43 55x55 70x55

Non-standard box dimensions [cm]
Dimensions given below are approximate dimensions only

Min-Max length 50-100
Min-Max width 50-100

*Unusual dimensions available in full sizes

WS MAXI

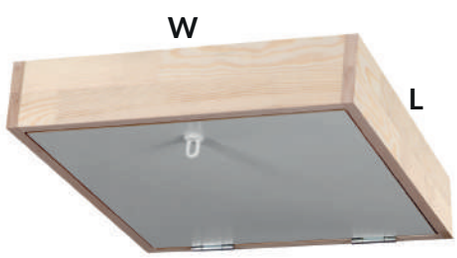

U_d =0,7 W/m²·K

2x SEALS

3 YEARS GUARANTEE

Insulated hatch thickness	56 mm
Thickness of thermal instulation	50 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Frame material	Softwood
Slotted hinge	Metal
Guarantee	3 years
Type of opening	Drop-down
Type of lock	Locking latch when closed
Opening to the left or to the right side	
Purpose of use	Interior

Box dimensions [cm] LxW
51x43 55x55 70x55

Non-standard box dimensions [cm]
Dimensions given below are approximate dimensions only

Min-Max length 50-100
Min-Max width 50-100

*Unusual dimensions available in full sizes

WS EXTRA

U_d =0,85 W/m²·K

1x SEAL

3 YEARS GUARANTEE

Insulated hatch thickness	46 mm
Thickness of thermal instulation	40 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Frame material	Softwood
Slotted hinge	Metal
Guarantee	3 years
Type of opening	Drop-down
Type of lock	Locking latch when closed
Opening to the left or to the right side	
Purpose of use	Interior

Box dimensions [cm] LxW

51x43 55x55 70x55

Non-standard box dimensions [cm]

Dimensions given below are approximate dimensions only

Min-Max length 50-100
Min-Max width 50-100

*Unusual dimensions available in full sizes

WS TERMO

U_d =1,22 W/m²·K

1x SEAL

3 YEARS GUARANTEE

Insulated hatch thickness	26 mm
Thickness of thermal instulation	20 mm
Hatch colour form both sides	White
Frame height	110 mm
Frame thickness	30 mm
Frame material	Softwood
Slotted hinge	Metal
Guarantee	3 years
Type of opening	Drop-down
Type of lock	Locking latch when closed
Opening to the left or to the right side	
Purpose of use	Interior

Box dimensions [cm] LxW

51x43 55x55 70x55

Non-standard box dimensions [cm]

Dimensions given below are approximate dimensions only

Min-Max length 50-100
Min-Max width 50-100

*Unusual dimensions available in full sizes

TECHNICAL DRAWINGS

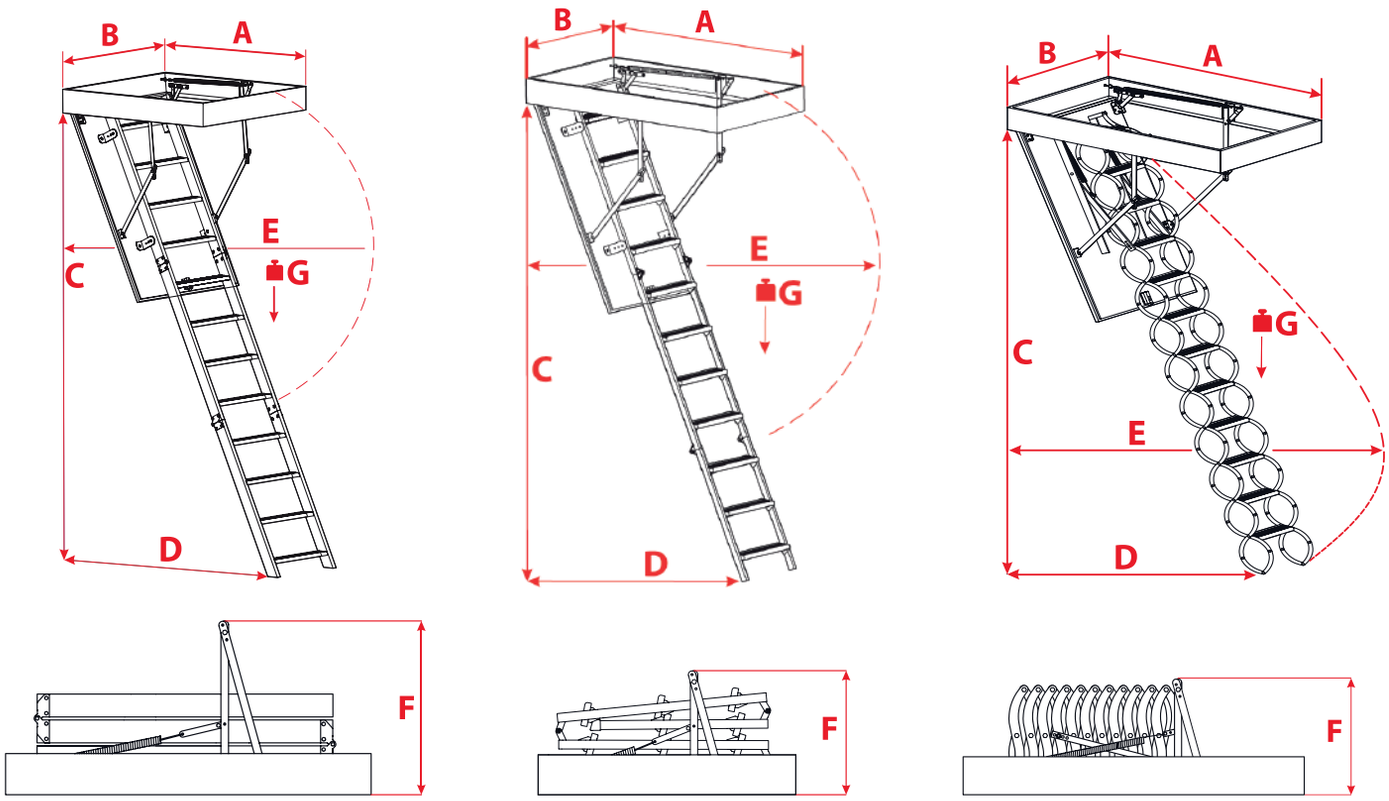

CLASSIC LOFT LADDERS

CLASSIC LOFT LADDERS		POLAR/POLAR Z												POLAR PLUS		MAXI						MAXI PLUS		EXTRA									KOMFORT/TERMO PS								
DIMENSIONS	A X B	113 x 55	113 x 60	113 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70	120 x 60	120 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	120 x 60	120 x 70	110 x 55	110 x 60	110 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70	110 x 55	110 x 60	110 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70
	C	280 cm																																												
	D	139 cm			147 cm											151 cm								128 cm			142 cm								134 cm			148 cm							
	E	165 cm			169 cm											168 cm								161 cm			165 cm								160 cm			166 cm							
	F	59 cm			62 cm											60 cm								58 cm																					
	G	160 kg																																												
NON-STANDARD BOX DIMENSIONS	MIN - MAX LENGTH	(113 cm) 120 - 140 cm												–		116 - 130 cm						–		110 - 140 cm																					
	MIN - MAX WIDTH	54 - 80 cm												–		54 - 70 cm						–		54 - 80 cm											54 - 85 cm									
	MINIMAL DIMENSION	113 x 54 cm												–		116 x 54 cm						–		110 x 54 cm																					
ADDITIONAL ACCESORIES	HATCH BALUSTRADE DSS B	✓																																											
	MASKING BATTEN DSS LM-1	✓												●		✓						●		✓																					
	MOUNTING SYSTEM DSS ZM-1	✓																																											
	PROTECTIVE FEET DSS S-1	●																																											
	4 SECTION LADDER PSS D-1	✕			✓									✕												✓									✕			✓							
	ADDITIONAL STEP DSS DS-2	●														✓																				✕								
	ADDITIONAL FLEX STEP DSS DS-3	✕																																											
	HANDRAIL DSS P-1/DSS P-3	●/✓ **												✕		●/✓ **						✕		●/✓ **											●/✓ **									

Unusual dimensions available in full sizes.
The size of untypical stairs can not exceed 1m²

● - INCLUDED ✓ - POSSIBILITY OF PURCHASE ✕ - NO POSSIBILITY OF MOUNTING
* - ADDITIONAL HANDRAIL TO THE OTHER SIDE OF THE LADDER ** - NOT APPLICABLE FOR 54CM WIDE SIZES

MINI LOFT LADDERS

MINI LOFT LADDERS		MINI POLAR												MINI EXTRA						MINI TERMO					
DIMENSIONS	A X B	90 x 50	90 x 55	90 x 60	90 x 70	100 x 50	100 x 55	100 x 60	100 x 70	110 x 50	110 x 55	110 x 60	110 x 70	80 x 60	80 x 70	90 x 60	90 x 70	100 x 60	100 x 70	80 x 60	80 x 70	90 x 60	90 x 70	100 x 60	100 x 70
	C	265 cm												260 cm		265 cm				260 cm		265 cm			
	D	149 cm				142 cm								103 cm		130 cm				101 cm		135 cm			
	E	132 cm				133 cm								120 cm		125 cm				115 cm		126 cm		125 cm	
	F	51 cm												47 cm											
	G	160 kg																							
NON-STANDARD BOX DIMENSIONS	MIN - MAX LENGTH	90 - 110 cm												80 - 100 cm						80 - 100 cm					
	MIN - MAX WIDTH	50 - 80 cm												60 - 80 cm						60 - 85 cm					
	MINIMAL DIMENSION	90 x 50 cm												80 x 60 cm						80 x 60 cm					
ADDITIONAL ACCESORIES	HATCH BALUSTRADE DSS B	✓																							
	MASKING BATTEN DSS LM-1	✓																							
	MOUNTING SYSTEM DSS ZM-1	✓																							
	PROTECTIVE FEET DSS S-1	●																							
	4 SECTION LADDER PSS D-1	✕																							
	ADDITIONAL STEP DSS DS-2	●												✕											
	ADDITIONAL FLEX STEP DSS DS-3	✕																							
	HANDRAIL DSS P-1/DSS P-3	●/✓ **												●/✓ *						✓					

Unusual dimensions available in full sizes.
The size of untypical stairs can not exceed 1m²

● - INCLUDED ✓ - POSSIBILITY OF PURCHASE ✕ - NO POSSIBILITY OF MOUNTING
* - ADDITIONAL HANDRAIL TO THE OTHER SIDE OF THE LADDER ** - NOT APPLICABLE FOR 54CM WIDE SIZES

FLEX LOFT LADDERS

FLEX LEFT LADDERS		FLEX POLAR		FLEX TERMO												FLEX TERMO METALBOX															
DIMENSIONS	A X B	120 x 60	120 x 70	70 x 60	70 x 70	80 x 60	80 x 70	90 x 60	90 x 70	100 x 60	100 x 70	110 x 60	110 x 70	120 x 60	120 x 70	130 x 60	130 x 70	70 x 50	70 x 60	70 x 70	80 x 50	80 x 60	80 x 70	90 x 50	90 x 60	90 x 70	100 x 50	100 x 60	100 x 70	110 x 60	110 x 70	120 x 60	120 x 70	130 x 60	130 x 70
	C	290 cm																																	
	D	210 cm		200 cm		210 cm				195 cm								200 cm			210 cm									195 cm					
	E	245 cm		220 cm		245 cm				225 cm		230 cm						220 cm			245 cm									225 cm		230 cm			
	F	62 cm		50 cm		47 cm				58 cm								50 cm			47 cm									58 cm					
	G	160 kg																																	
NON-STANDARD BOX DIMENSIONS	MIN - MAX LENGTH	–		70 - 130 cm														–																
	MIN - MAX WIDTH	–		60 - 75 cm														–																
	MINIMAL DIMENSION	–		70 x 60 cm														–																
ADDITIONAL ACCESORIES	HATCH BALUSTRADE DSS B	✓																✕																
	MASKING BATTEN DSS LM-1	✓																✕																
	MOUNTING SYSTEM DSS ZM-1	✓																✕																
	PROTECTIVE FEET DSS S-1	✕																																	
	4 SECTION LADDER PSS D-1	✕																																	
	ADDITIONAL STEP DSS DS-2	●																✕																
	ADDITIONAL FLEX STEP DSS DS-3	✕				✓												✕																
	HANDRAIL DSS P-1/DSS P-3	✕																																	

Unusual dimensions available in full sizes.
The size of untypical stairs can not exceed 1m²

● - INCLUDED ✓ - POSSIBILITY OF PURCHASE ✕ - NO POSSIBILITY OF MOUNTING
* - ADDITIONAL HANDRAIL TO THE OTHER SIDE OF THE LADDER ** - NOT APPLICABLE FOR 54CM WIDE SIZES

TECHNISCHE SPEZIFIKATION

SOLID LOFT LADDERS

SOLID LOFT LADDERS		SOLID POLAR												SOLID EXTRA												SOLID TERMO											
DIMENSIONS	A X B	113 x 55	113 x 60	113 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70	110 x 55	110 x 60	110 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70	110 x 55	110 x 60	110 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70
	C	280 cm																																			
	D	139 cm			147 cm									128 cm			142 cm									134 cm			148 cm								
	E	165 cm			169 cm									161 cm			165 cm									160 cm			166 cm								
	F	59 cm			62 cm									58 cm																							
	G	210 kg																								190 kg											
NON-STANDARD BOX DIMENSIONS	MIN - MAX LENGTH	(113 cm) 120 - 140 cm												110 - 140 cm																							
	MIN - MAX WIDTH	54 - 80 cm																								54 - 85 cm											
	MINIMAL DIMENSION	113 x 54 cm												110 x 54 cm																							
ADDITIONAL ACCESORIES	HATCH BALUSTRADE DSS B	✓																																			
	MASKING BATTEN DSS LM-1	✓																																			
	MOUNTING SYSTEM DSS ZM-1	✓																																			
	PROTECTIVE FEET DSS S-1	●																																			
	4 SECTION LADDER PSS D-1	✕																																			
	ADDITIONAL STEP DSS DS-2				●									✓												✕											
	ADDITIONAL FLEX STEP DSS DS-3	✕																																			
	HANDRAIL DSS P-1/DSS P-3	●/✓ **																								✓**											

Unusual dimensions available in full sizes.
The size of untypical stairs can not exceed 1m²

● - INCLUDED ✓ - POSSIBILITY OF PURCHASE ✕ - NO POSSIBILITY OF MOUNTING
* - ADDITIONAL HANDRAIL TO THE OTHER SIDE OF THE LADDER ** - NOT APPLICABLE FOR 54CM WIDE SIZES

LONG LOFT LADDERS

LONG LOFT LADDERS		LONG EXTRA									LONG TERMO PS									LONG FLEX TERMO												LONG POLAR			
DIMENSIONS	A X B	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70	80 x 60	80 x 70	90 x 60	90 x 70	100 x 60	100 x 70	110 x 60	110 x 70	120 x 60	120 x 70	130 x 60	130 x 70	120 x 60	120 x 70	130 x 60	130 x 70
	C	330 cm																		310 cm															
	D	165 cm									172 cm									220 cm						205 cm						175 cm			
	E	167 cm									168 cm									265 cm						245 cm		250 cm				172 cm			
	F	58 cm																		47 cm						58 cm									
	G	160 kg																																	
NON-STANDARD BOX DIMENSIONS	MIN - MAX LENGTH	120 - 140 cm																		80 - 130 cm												120 - 130 cm			
	MIN - MAX WIDTH	54 - 80 cm									54 - 85 cm									60 - 75 cm												54 - 70 cm			
	MINIMAL DIMENSION	120 x 54 cm																		80 x 60 cm												120 x 54 cm			
ADDITIONAL ACCESORIES	HATCH BALUSTRADE DSS B	✓																																	
	MASKING BATTEN DSS LM-1	✓																																	
	MOUNTING SYSTEM DSS ZM-1	✓																																	
	PROTECTIVE FEET DSS S-1	●																		✕												●			
	4 SECTION LADDER PSS D-1	●																		✕												●			
	ADDITIONAL STEP DSS DS-2	✓									✕																					●			
	ADDITIONAL FLEX STEP DSS DS-3	✕																		●												✕			
	HANDRAIL DSS P-1/DSS P-3	●/✓ **																		✕												●/✓ **			

Unusual dimensions available in full sizes.
The size of untypical stairs can not exceed 1m²

● - INCLUDED ✓ - POSSIBILITY OF PURCHASE ✕ - NO POSSIBILITY OF MOUNTING
* - ADDITIONAL HANDRAIL TO THE OTHER SIDE OF THE LADDER ** - NOT APPLICABLE FOR 54CM WIDE SIZES

FIRE RESISTANT LOFT LADDERS

FIRE RESISTANT LOFT LADDERS		EI45				MINI EI45				EI45 POLAR				EI 60**				SOLID EI60***				LONG EI45	
DIMENSIONS	A X B	120 x 60	120 x 70	130 x 60	130 x 70	90 x 60	90 x 70	100 x 60	100 x 70	120 x 60	120 x 70	130 x 60	130 x 70	120 x 60	120 x 70	130 x 60	130 x 70	120 x 60	120 x 70	130 x 60	130 x 70	120 x 60	120 x 70
	C	280 cm				265 cm				280 cm				280 cm								310 cm	
	D	145 cm				130 cm				147 cm				145 cm								165 cm	
	E	168 cm				125 cm				169 cm				168 cm								171 cm	
	F	60 cm				47 cm				58 cm				60 cm								58 cm	
	G	160 kg												210 kg								160 kg	
NON-STANDARD BOX DIMENSIONS	MIN - MAX LENGTH	–																					
	MIN - MAX WIDTH	–																					
	MINIMAL DIMENSION	–																					
ADDITIONAL ACCESORIES	HATCH BALUSTRADE DSS B	✓																					
	MASKING BATTEN DSS LM-1	✕																					
	MOUNTING SYSTEM DSS ZM-1	✕																					
	PROTECTIVE FEET DSS S-1	●																					
	4 SECTION LADDER PSS D-1	✕																				✓	
	ADDITIONAL STEP DSS DS-2			✕						●				✕									
	ADDITIONAL FLEX STEP DSS DS-3	✕																					
	HANDRAIL DSS P-1/DSS P-3	●/✓ *																					

Unusual dimensions available in full sizes.
The size of untypical stairs can not exceed 1m²

● - INCLUDED ✓ - POSSIBILITY OF PURCHASE ✕ - NO POSSIBILITY OF MOUNTING
* - ADDITIONAL HANDRAIL TO THE OTHER SIDE OF THE LADDER ** - NOT APPLICABLE FOR 54CM WIDE SIZES

OTHER LOFT LADDERS

OTHER LOFT LADDERS		ALUPROFI EXTRA												STALLUX TERMO												COMPACT TERMO		
DIMENSIONS	A X B	110 x 55	110 x 60	110 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70	110 x 55	110 x 60	110 x 70	120 x 55	120 x 60	120 x 70	130 x 55	130 x 60	130 x 70	140 x 55	140 x 60	140 x 70	100 x 55	100 x 60	100 x 70
	C	280 cm																										
	D	128 cm			142 cm									134 cm			148 cm									146 cm		
	E	161 cm			165 cm									160 cm			166 cm									135 cm		
	F	58 cm																								47 cm		
	G	160 kg																										
NON-STANDARD BOX DIMENSIONS	MIN - MAX LENGTH	110 - 140 cm																								100 - 110 cm		
	MIN - MAX WIDTH	54 - 80 cm												54 - 85 cm														
	MINIMAL DIMENSION	110 - 54 cm																								100 x 54 cm		
ADDITIONAL ACCESORIES	HATCH BALUSTRADE DSS B	✓																										
	MASKING BATTEN DSS LM-1	✓																										
	MOUNTING SYSTEM DSS ZM-1	✓																										
	PROTECTIVE FEET DSS S-1	●																										
	4 SECTION LADDER PSS D-1	✕																										
	ADDITIONAL STEP DSS DS-2	✓												✕														
	ADDITIONAL FLEX STEP DSS DS-3	✕																										
	HANDRAIL DSS P-1/DSS P-3	●/✓ **												●												✕		

Unusual dimensions available in full sizes.
The size of untypical stairs can not exceed 1m²

● - INCLUDED ✓ - POSSIBILITY OF PURCHASE ✕ - NO POSSIBILITY OF MOUNTING
* - ADDITIONAL HANDRAIL TO THE OTHER SIDE OF THE LADDER ** - NOT APPLICABLE FOR 54CM WIDE SIZES

OMAN SP. Z O.O.
ZAMKOWA 11
47-400 RACIBÓRZ
32 419 85 00

In case of any questions, we will be pleased to answer:

+48 600 827 918
WDT@OMAN.PL

www.oman.eu

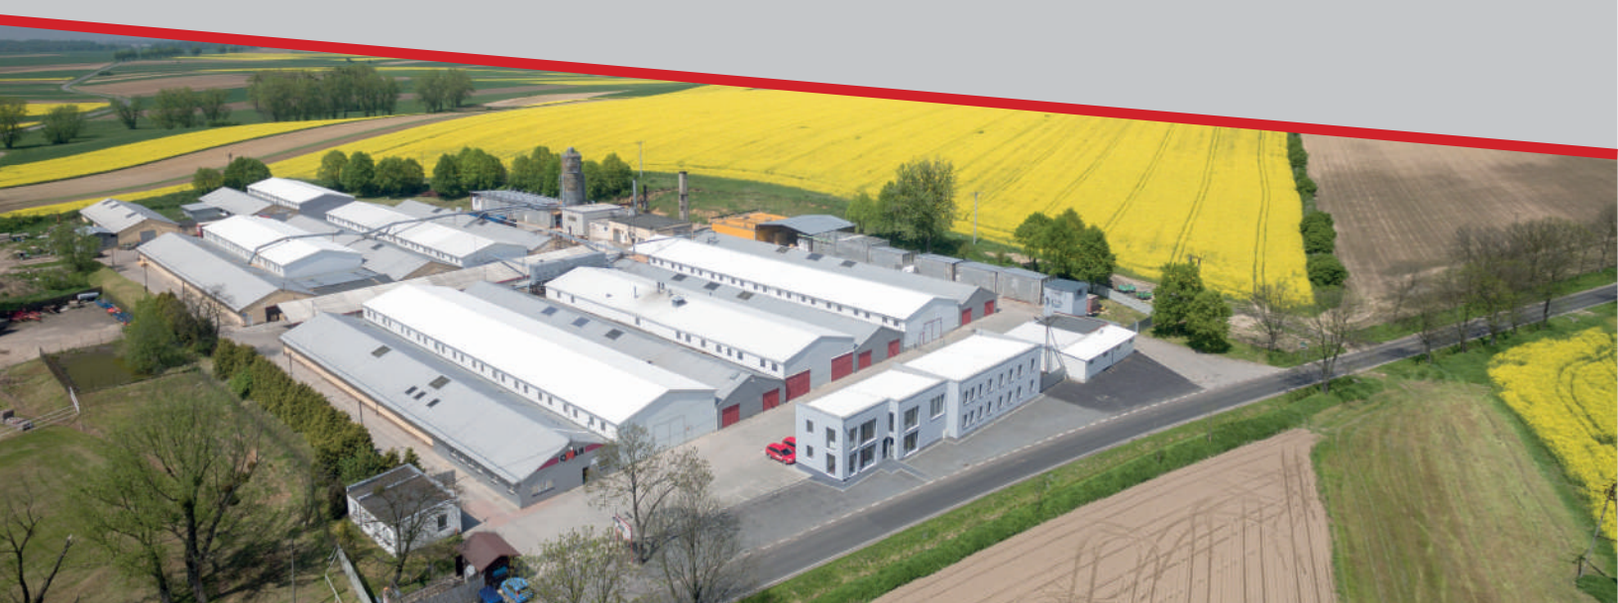

OMAN Sp z o.o. reserves the right to change specifications and technical parameters of products without prior notice.