

# FLEX TERMO METALBOX



**U<sub>d</sub> VALUE**  
(W/m<sup>2</sup> \* K)



**MAXIMUM  
LOAD**



**HATCH  
THICKNESS**



**STEPS  
FLEX**



**YEARS  
GUARANTEE**



**COMPLIANCE WITH  
THE STANDARD**

**OMAN<sup>®</sup>**



# FLEX TERMO METALBOX

The **FLEX TERMO METALBOX** loft ladder is characterised by a 26mm thick hatch. The **FLEX TERMO METALBOX** model is ideal for conditions where the loft is poorly insulated and requires additional thermal insulation. The **FLEX** staircase model, thanks to the use of a robust metal extendable 'scissor' ladder, is ideal for installation in rooms up to 290 cm high. Excellent quality of materials used in the production of the stairs, as well as attention to every detail of the finish, make the stairs satisfy even the most demanding customers. Even the most demanding customers will be satisfied with the maximum load of 160 kg.

## Technical specification


|                                 |                                 |
|---------------------------------|---------------------------------|
| INSULATED HATCH THICKNESS       | 26 mm                           |
| THICKNESS OF THERMAL INSULATION | 20 mm                           |
| HATCH COLOUR FROM BOTH SIDES    | biały                           |
| FLEX LADDER                     | 10 stopni                       |
| HEIGHT OF METAL BOX             | 145 mm                          |
| WIDTH OF LADDER                 | x50 = 290 mm<br>x60/70 = 390 mm |
| WIDTH OF STEP                   | x50 = 245 mm<br>x60/70 = 345 mm |
| DEPTH OF STEP                   | 80 mm                           |
| LANDING SPACE                   | 210 cm                          |
| OPENING DISTANCE/ANGLE          | 245 cm                          |
| MAXIMUM CEILING HEIGHT          | 290 cm                          |

## Box dimensions [cm]

Outer box dimensions, mounting opening 2 cm larger.

|         |         |         |          |          |          |          |
|---------|---------|---------|----------|----------|----------|----------|
| 70 x 50 | 80 x 50 | 90 x 50 | 100 x 50 |          |          |          |
| 70 x 60 | 80 x 60 | 90 x 60 | 100 x 60 | 110 x 60 | 120 x 60 | 130 x 60 |
| 70 x 70 | 80 x 70 | 90 x 70 | 100 x 70 | 110 x 70 | 120 x 70 | 130 x 70 |

## Technical draw

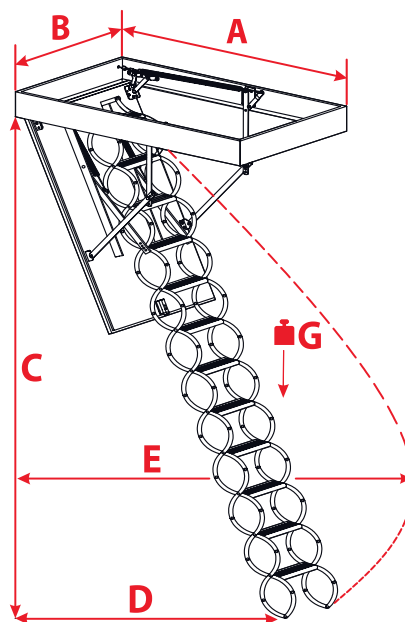

C 290 cm

G 160 kg

|   |        |        |        |         |
|---|--------|--------|--------|---------|
| A | 70     | 80-100 | 110    | 120-130 |
| D | 200 cm | 210 cm | 195 cm |         |
| E | 220 cm | 245 cm | 225 cm | 230 cm  |