

COMPACT TERMO



U_d VALUE
(W/m² * K)



MAXIMUM
LOAD



HATCH
THICKNESS



SEAL



PROTECTIVE
FEET



YEARS
GUARANTEE



COMPLIANCE WITH
THE STANDARD

OMAN[®]



COMPACT TERMO

The **COMPACT TERMO** loft ladder is characterised by a single seal and a 26mm thick hatch. The **COMPACT TERMO** model is ideal for conditions where the loft is poorly insulated and requires additional thermal insulation. The **COMPACT** model of the staircase is ideal for installation in narrow and small corridors due to its small installation dimensions. The small size of the stairs has been achieved through the use of a unique 4-section wooden ladder. The excellent quality of materials used in the production of the stairs and attention to every detail of the finish ensure that the stairs will satisfy even the most demanding customers, and their maximum load during use is as high as 160 kg.

Technical specification

INSULATED HATCH THICKNESS	26 mm
THICKNESS OF THERMAL INSULATION	20 mm
HATCH COLOUR FROM BOTH SIDES	white
WOODEN LADDER	4 sections
HEIGHT OF WOODEN BOX	135 mm
WIDTH OF LADDER	400 mm
WIDTH OF STEP	358 mm
DEPTH OF STEP	80 mm
MAXIMAL LANDING SPACE	146 cm
OPENING DISTANCE	135 cm
MAXIMUM CEILING HEIGHT	280 cm

Box dimensions [cm] A x B

Outer box dimensions, mounting opening 2 cm longer.


100 x 55
100 x 60
100 x 70

Non-standard dimensions

Min - Max Length	100 - 110 cm
Min - Max Width	54 - 80 cm

*Unusual dimensions available in full size of untypical stairs can not exceed 1 m².

Technical drawing

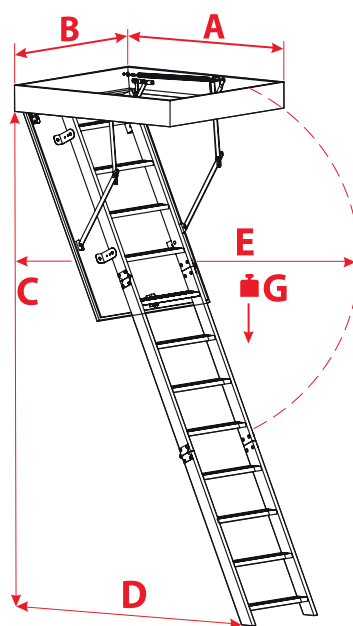

C	280 cm
D	146 cm
E	135 cm
G	160 kg


Accessories



MASKING
BATTEN



MOUNTING
SYSTEM



HATCH
BALUSTRADE

