

EI 60



U_d VALUE
(W/m² * K)



**FIRE RESISTANT
SEAL**



**PROTECTIVE
FEET**



SEAL



HANDRAIL



**HATCH
THICKNESS**



**YEARS
GUARANTEE**



**COMPLIANCE WITH
THE STANDARD**

OMAN[®]



EI 60

The **EI 60** loft ladder has a triple sealing, including a single fire seal and a 66 mm thick hatch. The **EI 60** model has non-slip feet which perfectly adhere to the floor, prevent scratching of the floor surface and constitute an aesthetic finish of the ladder after it has been cut. For increased safety and comfort of use, the **EI 60** stairs are equipped with a stable and durable handrail. For the user's convenience, the handrail has been designed so that it can be installed on the left or right side, depending on the customer's preference. The excellent quality of materials used in the production of the stairs and attention to every detail of the finish ensure that the stairs will satisfy even the most demanding customers, and their maximum load during use is up to 160 kg.

Technical specification


INSULATED HATCH THICKNESS	66 mm
THICKNESS OF THERMAL INSULATION	60 mm
HATCH COLOUR FROM BOTH SIDES	white
WOODEN LADDER	3 sections
HEIGHT OF WOODEN BOX	170 mm
WIDTH OF LADDER	400 mm
WIDTH OF STEP	358 mm
DEPTH OF STEP	80 mm
MAXIMAL LANDING SPACE	145 cm
OPENING DISTANCE	168 cm
MAXIMUM CEILING HEIGHT	280 cm

Box dimensions [cm] A x B

Outer box dimensions, mounting opening 2 cm longer.

120 x 60	130 x 60
120 x 70	130 x 70

Technical drawing

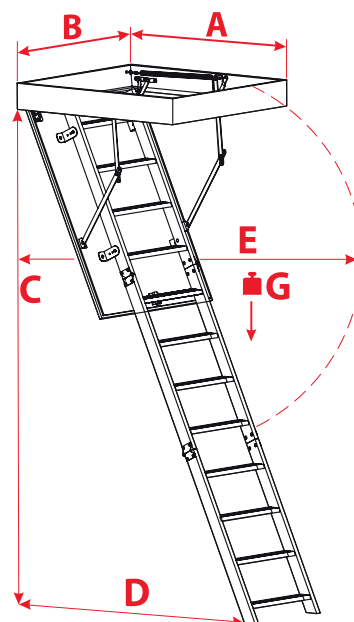

C	280 cm
D	145 cm
E	168 cm
G	160 kg

Accessories



HATCH
BALUSTRADE